

# FORWARD TECHNOLOGY F-500 SERIES Bi-Solvent Cleaning System

...designed specifically to employ SCAQMD Clean Air Certified Methyl Soyate\* and 3M™ Novec™ 7200 Engineered Fluid

**FORWARD TECHNOLOGY's Patent-Pending F-500 uses Clean Air Certified solvents with Crest's ceramically enhanced transducers to produce unrivaled cleaning for your application.**

## **Advantages**

- Our patent-pending process uses SCAQMD Certified Clean Air Solvents
- Methyl Soyate is biodegradable, inexpensive, and is an excellent solvent
- Bulk of contaminants are removed in the Methyl Soyate tank which minimizes the usage of 3M™ Novec™ 7200 Engineered Fluid
- Boil Sump Recycle Mode purges contaminated Methyl Soyate from the boil sump, reducing or eliminating the need to periodically drain the boil sump
- Smaller footprint and less expensive to operate when compared to aqueous cleaning and more eco-friendly than current solvent processes

## **Our Process**

- Parts are immersed in Methyl Soyate and sonicated, removing contaminants like oils, heavy waxes, and particles
- The parts are rinsed and sonicated in distilled 3M™ Novec™ 7200 Engineered Fluid and then dried
- The parts emerge from the machine clean and free from any residual Methyl Soyate

## **Features**

- Wash and Rinse Tanks clean with Crest 40, 58, 132, or 192 kHz ultrasonics
- Immersion heating
- Recirculation of Wash and Rinse Sump with Cartridge Filtration
- 120% freeboard ratio



**F-500-121010**



**Forward Technology**  
a Crest Group Company

\* Methyl Soyate from Ag Environmental Products, sold under the brand name Soygold 1000 and Soyclear 1500, meet the SCAQMD Rule 1122 Method 313 criteria for solvent degreasers, and are Clean Air Certified.

# F-500 Series Bi-Solvent Solvent Cleaning Systems

Model	Overall Dimensions W x L x H	Tank Size	Distillation Rate	Boiling Heat	Load Cap.	Solvent Capacity	Electrical Requirements	Ultrasonics
	<i>Inches</i>	<i>Inches</i>	<i>Gal/Hr</i>	<i>kW</i>	<i>Lbs/Hr</i>	<i>Gal</i>		
F-500-121010	36 x 60 x 70	12 x 10 x 8	5	2	150	15	208V-230V - 3 PH - 30A	40, 58, 132, 192 kHz - 1000W
F-500-181212	40 x 105 x 54	18 x 12 x 12	8	3.3	600	33	208V-230V - 3 PH - 60A	40, 58, 132, 192 kHz - 2000W
F-500-221410	44 x 115 x 50	22 x 14 x 10	10	4	1200	40	208V-230V - 3 PH - 60A	40, 58, 132, 192 kHz - 2000W
F-500-242020	52 x 120 x 70	24 x 20 x 20	16	6.5	2000	110	460V - 3 PH - 40A	40, 58, 132, 192 kHz - 3000W

The Forward Technology F-500 Series is ideal to remove organic residues like mold releases, waxes and pitches, lubricants, heavy greases, adhesives, inks, and other difficult to remove substances...all without the use of ozone depleters, hazardous air pollutants, or proposition 65 listed substances.



3050 Ranchview Lane North  
Minneapolis, MN 55447  
Phone: 763.559.1785  
Fax: 763.559.3929  
Email: info@forwardtech.com  
www.forwardtech.com


**1-800-307-6040**

## Safety

- Tank over temperature signal with solvent recycle notification
- Extended freeboard volume
- Immersion and boiling tank low level control
- Vapor level control with reset

## Options

- Desiccant water removal
- Baskets
- PLC controlled transport system and upper enclosure
- Automatic downtime cover
- Load / unload conveyors

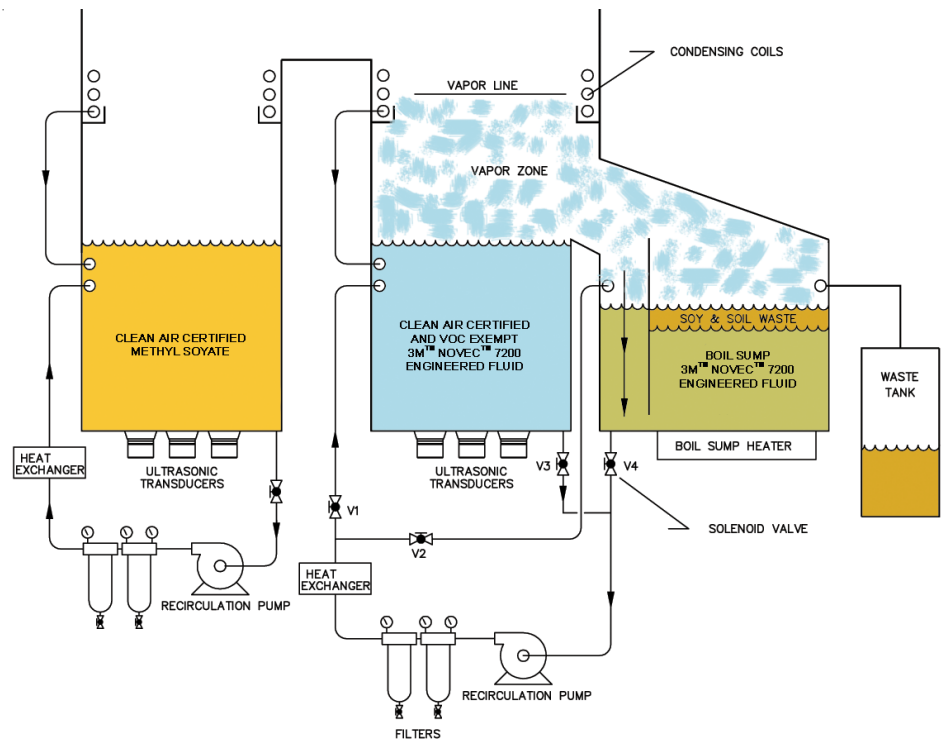

## Conceptual Layout