




The Handy Ones

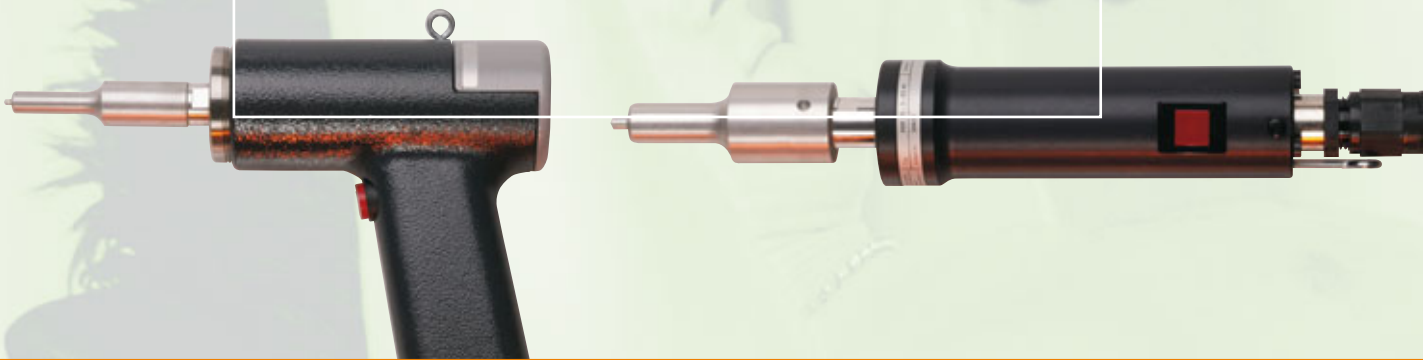


HG/HW 35-3

Ultrasonic hand welding units 35 kHz

The ultrasonic hand welding units HG35-3 and HW35-3 are suitable for manual welding and cutting operations from small to medium size.



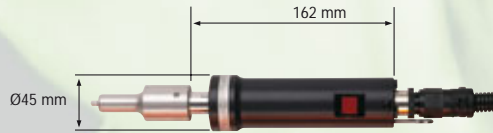

- Ideal for spot welding, riveting, beading or cutting with template horns
- Configurable with RL and SL generators
- Rugged construction for optimal sound propagation
- Protected cable duct

Specification HG35-3/HW35-3

Operating frequency:	35 kHz
Switches:	On the hand grip
Weight:	HW35-3: 0.7 kg including transducer HG35-3: 1.2 kg including converter 1.5 kg including converter and booster
Horns:	Customized, position of horn can be rotated by 90°
Amplitude amplification:	HW35-3: Integrated transducer (amplified 1:1.5) Integrated transducer (unamplified) HG35-3: Converter C35-11/13 (amplified 1:1.5), not included Converter C35-10/12 (unamplified) with booster 1:2, not included
Cable set:	3 m standard with integrated inner tube Special lengths 7 m/11 m/15 m on request
Generator:	Suitable types: RL35-250/400/600 , SL35-400/600
Options:	HW35-3: Pressurized air cooling for converter retrofit HG35-3: Pressurized air cooling for converter and horn retrofit

Additional technical information available on request.



RINCO ULTRASONICS AG
CH-8590 Romanshorn 1
Tel. +41 71 466 41 00
Fax +41 71 466 41 01
info@rincoultrasonics.com
www.rincoultrasonics.com